

7 JUL 2003

PST

REC'D PCT/PIC 16 DEC 2004

PCT/IB 03 / 0.2 5 9 9

12.06.03



INVESTOR IN PEOPLE

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*W. Evans*

Dated 19 March 2003

The  
Patent  
Office

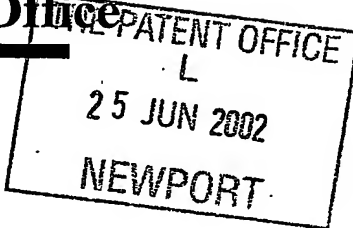

1/77

**Request for grant of a patent**

*(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form).*

The Patent Office  
Cardiff Road  
Newport  
Gwent NP10 8QQ

Your reference

PHGB020100

Patent application number

*(The Patent Office will fill in this part)*

0214621.5

25 JUN 2002

25JUN02 E728399-3 D02879

Full name, address and postcode of the or of each applicant *(underline all surnames)*

KONINKLIJKE PHILIPS ELECTRONICS NV 0214621.5  
GROENEWOUDSEWEG 1  
5621 BA EINDHOVEN  
THE NETHERLANDS

Patents ADP Number *(if you know it)*

7586605002

If the applicant is a corporate body, give the country/state of its incorporation

THE NETHERLANDS

Title of the invention

SIGNAL RECEIVER

Name of your agent *(if you have one)*

"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*

Andrew Gordon WHITE  
Philips Intellectual Property and Standards  
Cross Oak Lane  
Redhill  
Surrey RH1 5HA

Patents ADP number *(if you know it)*

7133473003

If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country

Priority Application number  
*(if you know it)*

Date of filing  
*(day/month/year)*

If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
*(day/month/year)*

Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer "Yes" if:*

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

*See note (d)*

- Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

Continuation sheets of this form

Description	10
Claims(s)	2
Abstract	1 <i>DMC</i>
Drawings	4 <i>only</i>

- If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents  
Statement of inventorship and right  
to grant of a patent (*Patents Form 7/77*)  
Request for preliminary examination and  
search (*Patents Form 9/77*)  
Request for substantive examination  
(*Patents Form 10/77*)  
Any other documents  
(*Please specify*)

I/We request the grant of a patent on the basis of this application.

Signature

*P. J. Mabey*

Date

*24/6/2002*

- Name and daytime telephone number of person to contact in the United Kingdom

01293815576

(Peter J Mabey)

Warning

When an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

## DESCRIPTION

## SIGNAL RECEIVER

5

The present invention relates to a signal receiver and in particular, but not exclusively, to a signal receiver suitable for receiving a wireless signal having a wide bandwidth.

10

The use of digital signal processing techniques to implement at least the baseband processing of a wireless receiver can bring benefits such as increased versatility and decreased cost. Commonly, an RF signal is mixed down to a low IF or to baseband before digitisation because digitisation at a high frequency requires a high speed analogue-to-digital converter (ADC). If  
15 conventional low-pass sampling is used to sample at the Nyquist rate, an ADC is required that can sample at twice the highest frequency of the signal. The sampling rate required for digitisation at RF may exceed the capability of commercially available ADCs, or require an ADC having a high power consumption or a high cost. Even after mixing down to a lower frequency,  
20 sampling at the Nyquist rate for the signal may exceed the capability of commercially available ADCs, or require an ADC having a high power consumption or a high cost.

Ultra-wideband is a technique for performing radio communication and radio positioning which relies on sending a signal comprising ultra-short pulses.  
25 Such ultra-short pulses typically occupy frequencies from zero to one or more GHz and it is not practical to use a single ADC which will digitise at the Nyquist rate a signal containing such high frequencies. One solution for reducing the sampling rate below the Nyquist rate for the signal is reported in "Ultra-wideband radar technology", edited by J.D. Taylor, CRC Press, 2001, pages  
30 77-78. This solution uses a bank of filters to separate the frequency spectrum of the signal into several sub-bands, mix each sub-band down to DC, and to digitise each sub-band separately using a bank of ADCs, each ADC sampling

at a rate equal to the highest frequency in the mixed-down sub-band. A block schematic diagram of this prior art solution is illustrated in Figure 1 which shows a portion of a receiver suitable for a signal having a spectrum 0-1GHz. The bank of filters, referred to as a channel dropping filter, divides the received  
5 signal into five sub-bands each 200MHz wide, and four mixers and four different local oscillator signals are required to bring the signal in all the sub-bands into the range 0-200MHz where a bank of five ADCs, each ADC sampling at 200MHz, is used to digitise the signal in the sub-bands. The digitised output from each ADC is used to reconstruct the signal waveform, although no method  
10 or apparatus for doing this is disclosed in the Taylor reference. A disadvantage of this solution is the requirement for a bank of mixers and a means for generating a different local oscillator signal for each mixer. Such a plurality of devices adds to complexity and cost because, for example, mixers are active devices that consume power, contribute noise and have a limited dynamic  
15 range.

An object of the present invention is to provide a signal receiver that overcomes at least some of the disadvantages of the prior art described above.

According to the invention there is provided a signal receiver comprising  
20 digitisation means for digitising a received signal and demodulation means for extracting the information content of the digitised received signal, wherein the digitisation means comprises filtering means for dividing the received signal into a plurality of frequency sub-bands, analogue-to-digital conversion means for digitising the signal in each sub-band, transform means for transforming the  
25 digitised signal in each sub-band into the frequency domain, and reconstruction means for concatenating in the frequency domain the digitised signal in each sub-band thereby reconstructing the spectrum of the received signal.

The reconstructed spectrum of the received signal may be at the same frequency as spectrum of the received signal prior to being divided into sub-  
30 bands, or may be at a lower frequency, for example a received signal having a bandpass spectrum may be shifted to DC.

By dividing the received signal into a plurality of sub-bands and digitising the signal in each sub-band, the requirement for an ADC capable of digitising the whole signal bandwidth by operating at the Nyquist rate is avoided. By digitising each sub-band without first downconverting each sub-band, the requirement for a bank of mixers and means for generating a different local oscillator signal for each mixer is avoided.

Optionally the received signal, if a bandpass signal, may be down-converted from a transmission frequency to a lower frequency prior to the digitisation means.

10        The sample rate required for digitising the signal in a sub-band depends on the bandwidth of that sub-band, as described below.

By judicious selection of sample rate for each sub-band, it is possible to use a common sample rate for a plurality of sub-bands, thereby simplifying the sample rate clock generation. Such sub-bands may have a common  
15        bandwidth.

By judicious selection of sample rate and bandwidth for each sub-band, it is possible to use a common sample rate for odd numbered sub-bands and a different common sample rate for even numbered sub-bands thereby simplifying the sample rate clock generation to two rates.

20        The analogue-to-digital conversion means may comprise an ADC for each sub-band. However, if the receiver is to be used to receive a signal that occupies only one sub-band at any one instant, such as a frequency hopping signal or a chirp signal, the analogue-to-digital conversion means need only digitise one sub-band at a time and a single ADC can be switched to each sub-  
25        band in turn, tracking the frequency of the received signal, thereby reducing the complexity of the analogue-to-digital conversion means.

The invention will now be described, by way of example only, with reference to the accompanying drawings wherein:

30        Figure 1 is block schematic diagram of a prior art receiver,

Figure 2 is a diagram of the frequency response of a filter bank,

Figure 3 is block schematic diagram of a first embodiment of a wireless receiver in accordance with the invention,

Figure 4 is block schematic diagram of a second embodiment of a wireless receiver in accordance with the invention, and

5 Figure 5 is a sketch illustrating sub-band spectra.

Referring to Figure 3 a first embodiment of the invention comprises a signal input 5 for receiving a signal from an antenna. Coupled to the signal input 5 is a low pass filter 10 for removing unwanted signal components from the received signal. Coupled to the output of the low pass filter 10 is an amplifier 20. The output of the amplifier 20 is coupled to an input of a filter bank 30. The filter bank 30 divides the signal delivered by the amplifier 20 into five sub-bands and the signals in each sub-band are delivered to respective ADCs 41-45 where they are digitised. Coupled to an output of each ADC is a respective FFT means 51-55 for transforming the digitised sub-band signal to the frequency domain, illustrated by the sketch 59 of a sub-band spectrum, using a Fast Fourier Transform (FFT). Coupled to an output of each FFT means 51-55 is a respective frequency shifting means 61-65 which performs a shifting of the frequency of the frequency domain sub-band signals to be positioned at DC, illustrated by the sketch 69 of a shifted sub-band spectrum, unless already at DC, by re-labelling of the frequencies. Coupled to an output of each frequency shifting means 61-65 is a respective storage portion 71-75 of a storage means 70. The frequency shifted sub-band signals are concatenated by storing them in their respective storage portions 71-75, thereby reconstructing the received signal in the frequency domain. An output of the storage means 70 is coupled to a first input of a multiplier means 80 which multiplies the reconstructed received signal by a reference signal, the reference signal being a replica of the signal spectrum as transmitted, being stored in a reference signal store 85 and being delivered to a second input of the multiplier means 80. An output of the multiplier means 80 is coupled to a means 90 for performing an Inverse Discrete Fourier Transform (IDFT) which provides on an output 95 a cross correlation between the received signal and the reference

signal. The output 95 is coupled to a processing means 96 for further processing of the cross-correlation function as required by the application for which the wireless receiver is to be used. For example, the time of occurrence of a peak in the correlation function may be measured to determine the flight time of the signal, and consequently the range of the transmitter from the receiver. As another example, the polarity of a peak in the correlation function may be determined to detect the value of a data bit conveyed by the signal. As a further example, modulation of the time of arrival of the received signal may be determined as conveying information.

Figure 2 shows the frequency response of a filter bank which divides a signal having a bandwidth  $f_b$  into  $N$  sub-bands. In Figure 2, each sub-band has the same bandwidth  $f_b/N$  but this is not essential. For the embodiment shown in Figure 3,  $N=5$ .

If the signals in the sub-bands are to be sampled by the respective ADCs 41-45 without aliasing; the ADC sampling rates must be selected to satisfy the following inequality:

$$\frac{2f_{u_i}}{r_i} \leq f_{s_i} \leq \frac{2f_{l_i}}{r_i - 1} \quad (1)$$

$i = 1 \dots N$ , where  $f_{s_i}$  is the sample rate for the  $i^{th}$  sub-band,  $f_{u_i}$  is the upper frequency limit of the  $i^{th}$  sub-band,  $f_{l_i}$  is the lower frequency limit of the  $i^{th}$  sub-

band, and  $r_i$  is an integer satisfying the inequality  $1 \leq r_i \leq \text{int}\left\{\frac{f_{u_i}}{f_{u_i} - f_{l_i}}\right\}$ . In

general, it is preferable that ADC sampling rates are selected such that aliasing is avoided, although for some types of received signal an amount of aliasing may be tolerable. In the following description it is assumed that aliasing is avoided.

Optionally  $r_i$  may be selected such that a plurality of sub-bands share a common sample rate, which simplifies sample rate clock generation. For example, for a 5-sub-band embodiment as shown in Figure 3, and denoting the bandwidth of the  $i^{th}$  sub-band as  $W_i$ , where  $W_i = f_{u_i} - f_{l_i}$ , gives



$$\text{sub-band 2: } 2(W_1 + W_2) \leq f_{c2} \leq \infty \quad \text{for } r_2=1, \quad (3)$$

$$\text{sub-band 3: } (W_1 + W_2 + W_3) \leq f_{i3} \leq 2(W_1 + W_2) \quad \text{for } r_3=2, \quad (4)$$

$$\text{sub-band 4: } (W_1 + W_2 + W_3 + W_4) \leq f_{c,4} \leq 2(W_1 + W_2 + W_3) \quad \text{for } r_4=2, \quad (5)$$

5    sub-band 5:  $\frac{2}{3}(\mathcal{W}_1 + \mathcal{W}_2 + \mathcal{W}_3 + \mathcal{W}_4 + \mathcal{W}_5) \leq f_{ss} \leq (\mathcal{W}_1 + \mathcal{W}_2 + \mathcal{W}_3 + \mathcal{W}_4)$  for  $r_s=3$  (6)

In this case, a common sample rate satisfying inequality (3) may be used for sub-bands 1 and 2.

Other possibilities of common sampling rates may be determined for specific values of  $r_i$  and sub-band bandwidth  $\mathcal{W}_i$ .

Sub-bands sharing a common sample rate may optionally have a common bandwidth. For example, if  $W_1 = W_3 = B$ , a common sampling rate can be used for sub-bands 1 and 3 provided that it satisfies the inequality  $3B \leq f_3 \leq 4B$ . As another example, if  $W_2 = W_4 = B$ , a common sampling rate can be used for sub-bands 2 and 4 provided that it satisfies the inequality  $4B \leq f_4 \leq 6B$ .

Particularly advantageous sample rates can be derived by setting

$$r_i = \left\lfloor \frac{i+1}{2} \right\rfloor \text{ and } W_i=B \text{ for all values of } i, \text{ i.e. a common bandwidth for all sub-}$$

bands. In this case only two different sample rates are required; a first common sample rate may be used for all the odd numbered sub-bands, provided that it satisfies the inequality (1) for the highest odd-numbered sub-band, and a second, different common sample rate may be used for all the even numbered sub-bands, provided that it satisfies the inequality (1) for the highest even-numbered sub-band. For the embodiment shown in Figure 3 and a common bandwidth of  $B=200\text{MHz}$  for all sub-bands, the first common sample rate must satisfy the inequality  $\frac{10}{3}B \leq f_{s_s} \leq 4B$ , and so a value of 733MHz would

conveniently lie in the centre of the allowable range, and the second, different common sample rate must satisfy the inequality  $4\delta \leq f_c \leq 6\delta$ , and so a value

Other possibilities of a first common sampling rate for the odd-numbered sub-bands and a different common sample rate for the even numbered sub-bands may be determined for specific values of sub-band bandwidth  $W_i$  where the sub-band bandwidths are unequal.

5        The acceptable range of values of the sample rate as expressed by the inequality (1) defines the acceptable limits of frequency error that each sample rate may have. It is preferable to select sample rates that lie approximately in the centre of their respective acceptable range. For the embodiment shown in Figure 3 and with  $B=200\text{MHz}$ , the tolerance on a first common sample rate of  
10        733MHz is approximately  $\pm 9\%$ , and the tolerance on a second common sample rate of 1GHz is  $\pm 20\%$ . Alternatively, for a chosen sample rate  $f_{s_i}$ , the inequality (1) can be used to define the acceptable tolerance limits on  $f_{l_i}$  and  $f_{u_i}$  for the respective sub-bands provided by the filter bank 30. Of course the tolerance on the sample rate may be traded for tolerance on  $f_{l_i}$  and  $f_{u_i}$ .

15        The digitised sub-band signals delivered by the ADCs 41-45 include copies of the sub-band spectrum replicated at integer multiples of the sample rate. Therefore, the FFT means 51-55 comprise filtering means for selecting a single sub-band spectrum. Figure 5 illustrates sub-band spectra (amplitude  $A$  versus frequency  $f$ ) for the example of a 0-1GHz signal divided into sub-bands  
20        200MHz wide.

Figure 5 plot 5(a) illustrates the first sub-band spectrum at 0-200MHz with a sample rate of  $f_{s_1}=733\text{MHz}$ . Replica spectra are all above 200MHz and are filtered out by the FFT means 51; they are not shown in plot (a).

Plot (b) illustrates the second sub-band spectrum at 200-400MHz with a  
25        sample rate of  $f_{s_2}=1\text{GHz}$ . Replica spectra are all above 400MHz and are filtered out by the FFT means 52; they are not shown in plot (b).

Plot (c) illustrates the third sub-band spectrum at 400-600MHz sampled at a sample rate of 733MHz. The sampling process generates a replica of the sub-band spectrum at 133-333MHz, reversed such that the lower frequencies of  
30        the sub-band prior to sampling now appear as the upper frequencies of the

replica at 133-333MHz. In Figure 5, the envelopes of the replica sub-band spectra are indicated with a broken line. The FFT means 53 comprises means for selecting the replica sub-band spectrum at 133-333MHz and also for reversing its spectrum to restore the order of its frequency components.

5 Plot (d) illustrates the fourth sub-band spectrum at 600-800MHz sampled at a sample rate of 1GHz. The sampling process generates a replica of the sub-band spectrum at 200-400MHz, reversed such that the lower frequencies of the sub-band prior to sampling now appear as the upper frequencies of the replica at 200-400MHz. The FFT means 54 comprises means for selecting the  
10 replica sub-band spectrum at 200-400MHz and also reversing its spectrum to restore the order of its frequency components.

Plot (e) illustrates the fifth sub-band spectrum at 800-1000MHz sampled at a sample rate of 733MHz. The sampling process generates a replica of the spectrum at 67-267MHz without any reversal. The FFT means 55 comprises  
15 means for selecting the replica sub-band spectrum at 133-333MHz.

The frequency shifting means 61-65 are used to shift each selected sub-band spectrum to DC. For the example, as illustrated in Figure 5, the shift required by sub-bands 2, 3, 4 and 5 are respectively 200MHz, 133MHz, 200MHz, and 67MHz. The shifting can be achieved by re-labelling the  
20 frequency of the spectral components.

The received signal is reconstructed in the frequency domain by concatenating the frequency shifted sub-band signals in the storage means 70. The process of concatenation shifts the  $i^{th}$  sub-band signal,  $i=2, N$ , in the frequency domain to respective frequencies  $f_i$ ,  $i=2, N$  which in the example  
25 illustrated in Figure 5 are 200, 400, 600 and 800MHz. The reconstructed spectrum is illustrated in Figure 3 by the sketch 79 of the spectrum delivered at the output of the storage means 70. The resolution of the FFT means 51-55 depends on the sample rate of the respective ADC 41-45; a high sample rate results in frequency components more closely spaced than a lower sample rate.  
30 Because the resolution of each the FFT means 51-55 is not equal, the frequency components of the reconstructed spectrum are not uniformly spaced

spectrum. The reference signal stored in the reference signal store 85 is specified at the same non-uniformly spaced frequency values as the reconstructed spectrum. The means 90 for performing an IDFT is able to operate with the non-uniform spaced frequency values.

5 Referring to Figure 4 which illustrates a second embodiment of the invention, identical reference numerals have been used for elements that are identical or similar to elements of the embodiment illustrated in Figure 3; the differences of elements of Figure 4 are described below. The embodiment illustrated in Figure 4 can be used if the receiver is to be used to receive a  
10 signal that occupies only one sub-band at any one instant, such as a frequency hopping signal or a chirp signal. A single ADC 41, FFT means 51 and frequency shifting means 61 is used. The input of the single ADC 41 is switched to each output of the filter bank 30 in turn by means of a first commutating switch means 100, and output of the single frequency shifting  
15 means 61 is switched to each storage portion 71-75 in turn by means of a second commutating switch means 101. The switching of the first and second commutating switch means 100, 101 is synchronised by a synchronisation means 99. The order in which sub-bands are selected for processing is predetermined to match the known frequency hopping sequence or known chirp  
20 profile of the transmitted signal. A clock generator 98 generates the sample rates required by the ADC 41 for digitising each sub-band in turn and a selection switch means 102 is synchronised by the synchronisation means 99 to select the required sample rate for each sub-band. The selection switch means 102 in Figure 4 provides for selection between two sample rates, but  
25 any required number of selections may be provided. The synchronisation means 99 is also coupled to the FFT means 51 to synchronise the switching of the filtering and reversing functions as appropriate to the current sub-band signal.

If the switching of the first and second commutating switch means 100, 101, the selection switch means 102, and the filtering and spectrum reversing of  
30 the FFT means 51 are not synchronised to the sub-band which the received signal occupies at any one instant, after one commutation cycle the storage

means 70 will not contain a complete set of sub-band signals and so the received signal will not be fully reconstructed in the storage means 70 and the cross-correlation function provided at the output 95 will exhibit weak correlation. The output 95 is coupled to an input of the synchronisation means 99 which  
5 adjusts the phase of the commutating switch means 100, 101, the selection switch means 102, and the filtering and reversing of the FFT means 51 until a maximum correlation is exhibited at the output 95. Optionally, means for detecting the signal strength in each sub-band may be included to provide an indication to the synchronisation means 99 of the current frequency occupancy  
10 of the received signal, thereby assisting the synchronisation means 99 to synchronise the commutating cycle, the selection switch means 102 and the FFT means 51 with the received signal.

Although the invention has been described by means of an example of a wireless receiver, the invention is equally applicable to a receiver for receiving a  
15 signal via a different medium, for example via wire or optically.

Although the invention has been described by means of an example of a receiver suitable for receiving a wide-band or ultra-wideband signal, the invention can also be used for receiving signals having a narrower bandwidth.

Optionally a demodulation process different to that described herein may  
20 be applied to demodulate the digitised received signal.

Optionally the receiver may comprise a power saving scheme in which some or all of the receiver elements adopt a power saving mode and are activated at intervals to receive a signal. For example, if the receiver is to be used to receive a signal having a duty cycle less than one, then a bank of ADCs  
25 can also be operated with a duty cycle less than one, sampling only for periods in which the signal is expected to be present.

In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further, the word "comprising" does not exclude the presence of other elements or  
30 steps than those listed.

## CLAIMS

1. A signal receiver comprising digitisation means for digitising a  
 5 received signal and demodulation means for extracting the information content  
 of the digitised received signal, wherein the digitisation means comprises  
 filtering means for dividing the received signal into a plurality of frequency sub-  
 bands, analogue-to-digital conversion means for digitising the signal in each  
 sub-band, transform means for transforming the digitised signal in each sub-  
 10 band into the frequency domain, and reconstruction means for concatenating in  
 the frequency domain the digitised signal in each sub-band thereby  
 reconstructing the spectrum of the received signal.

2. A receiver as claimed in claim 2, wherein the reconstruction  
 15 means reconstructs the spectrum of the received signal at a frequency lower  
 than the frequency of the spectrum of the received signal prior to being divided  
 into sub-bands.

3. A receiver as claimed in claim 1 or 2, wherein the analogue-to-  
 20 digital conversion means comprises means for sampling the signal in the  $i^{th}$   
 sub-band at a sample rate  $f_{s_i}$  in the range  $\frac{2f_{u_i}}{r_i} \leq f_{s_i} \leq \frac{2f_{l_i}}{r_i - 1}$  where  $f_{u_i}$  is the  
 upper frequency limit of the sub-band and  $f_{l_i}$  is the lower frequency limit of the  
 $i^{th}$  sub-band, and  $r_i$  is an integer satisfying the inequality  $1 \leq r_i \leq \text{int} \left\{ \frac{f_{u_i}}{f_{u_i} - f_{l_i}} \right\}$ .

25 4. A receiver as claimed in claim 3, wherein the analogue-to-digital  
 conversion means comprises means for sampling the signal in a plurality of the  
 sub-bands at a common sample rate.

5        5.        A receiver as claimed in claim 3, wherein the analogue-to-digital conversion means comprises means for sampling the signal in a first sub-set of the sub-bands at a first sample rate and for sampling the signal in a second sub-set of the sub-bands at a second sample rate and wherein the signal in adjacent sub-bands is sampled at unequal sample rates.

      6.        A receiver as claimed in claim 4 or 5, wherein the plurality of sub-bands having a common sample rate have a common bandwidth.

10        7.        A receiver as claimed in any one of claims 1 to 6, wherein the analogue-to-digital conversion means comprises means for digitising a plurality of sub-bands sequentially.

15        8.        A receiver as claimed in claim 7, wherein the transform means comprises means for transforming the digitised signal in a plurality of the sub-bands sequentially.

20        9.        A receiver as claimed in any one of claims 1 to 8, wherein the reconstruction means comprises means for selecting a replica spectrum of a sub-band signal and means for re-inverting the replica spectrum if the replica spectrum is inverted.

25        10.       A receiver as claimed in any one of claims 1 to 9, wherein the demodulation means comprises means for multiplying the reconstructed received signal by a reference signal in the frequency domain at non-uniformly spaced frequencies.

30        11.       A receiver as claimed in any one of claims 1 to 9, comprising down-conversion means prior to the digitisation means for down-converting the received signal from a transmission frequency to a lower frequency.

**ABSTRACT****SIGNAL RECEIVER**

5

A signal receiver suitable for digitising a signal having a wide bandwidth comprises a filter bank (30) for dividing a received signal into a plurality of frequency sub-bands, means (41-45) for digitising each sub-band using a low sample rate, means (51) for transforming each digitised sub-band signals into  
10 the frequency domain, means (70) for concatenating the frequency domain sub-band signals to reconstruct the spectrum of the received signal. For a signal that occupies only one sub-band at any one instant, for example a frequency hopping signal or a chirp signal, a single analogue-to-digital converter may be used to digitise each sub-band in turn, and the transformation into the  
15 frequency domain may be performed for each sub-band in turn.

(Figure 3)



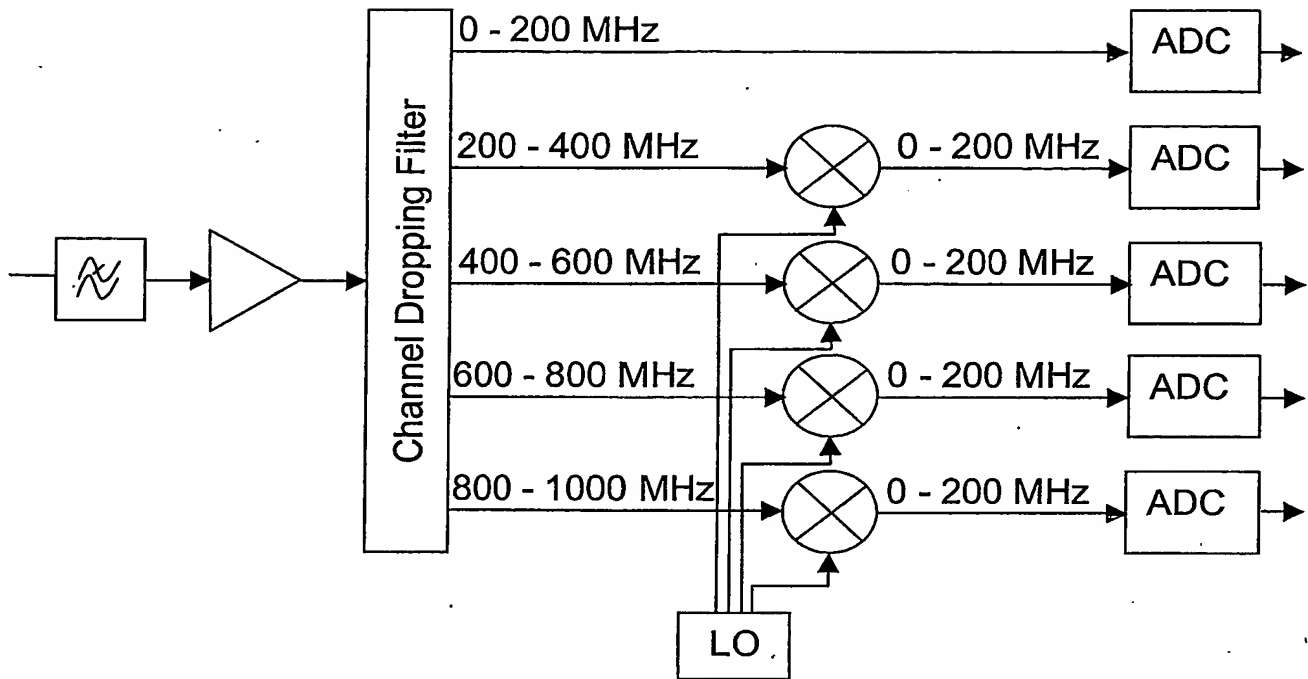


Fig. 1

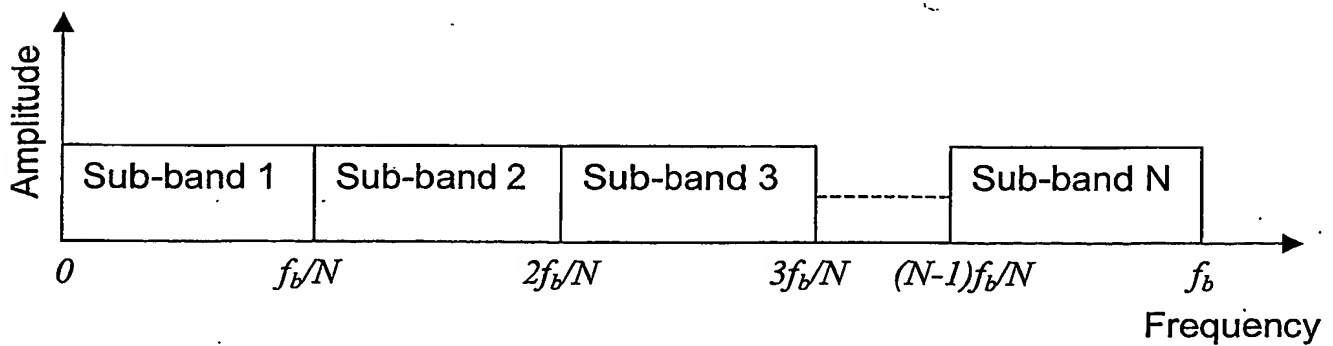


Fig. 2

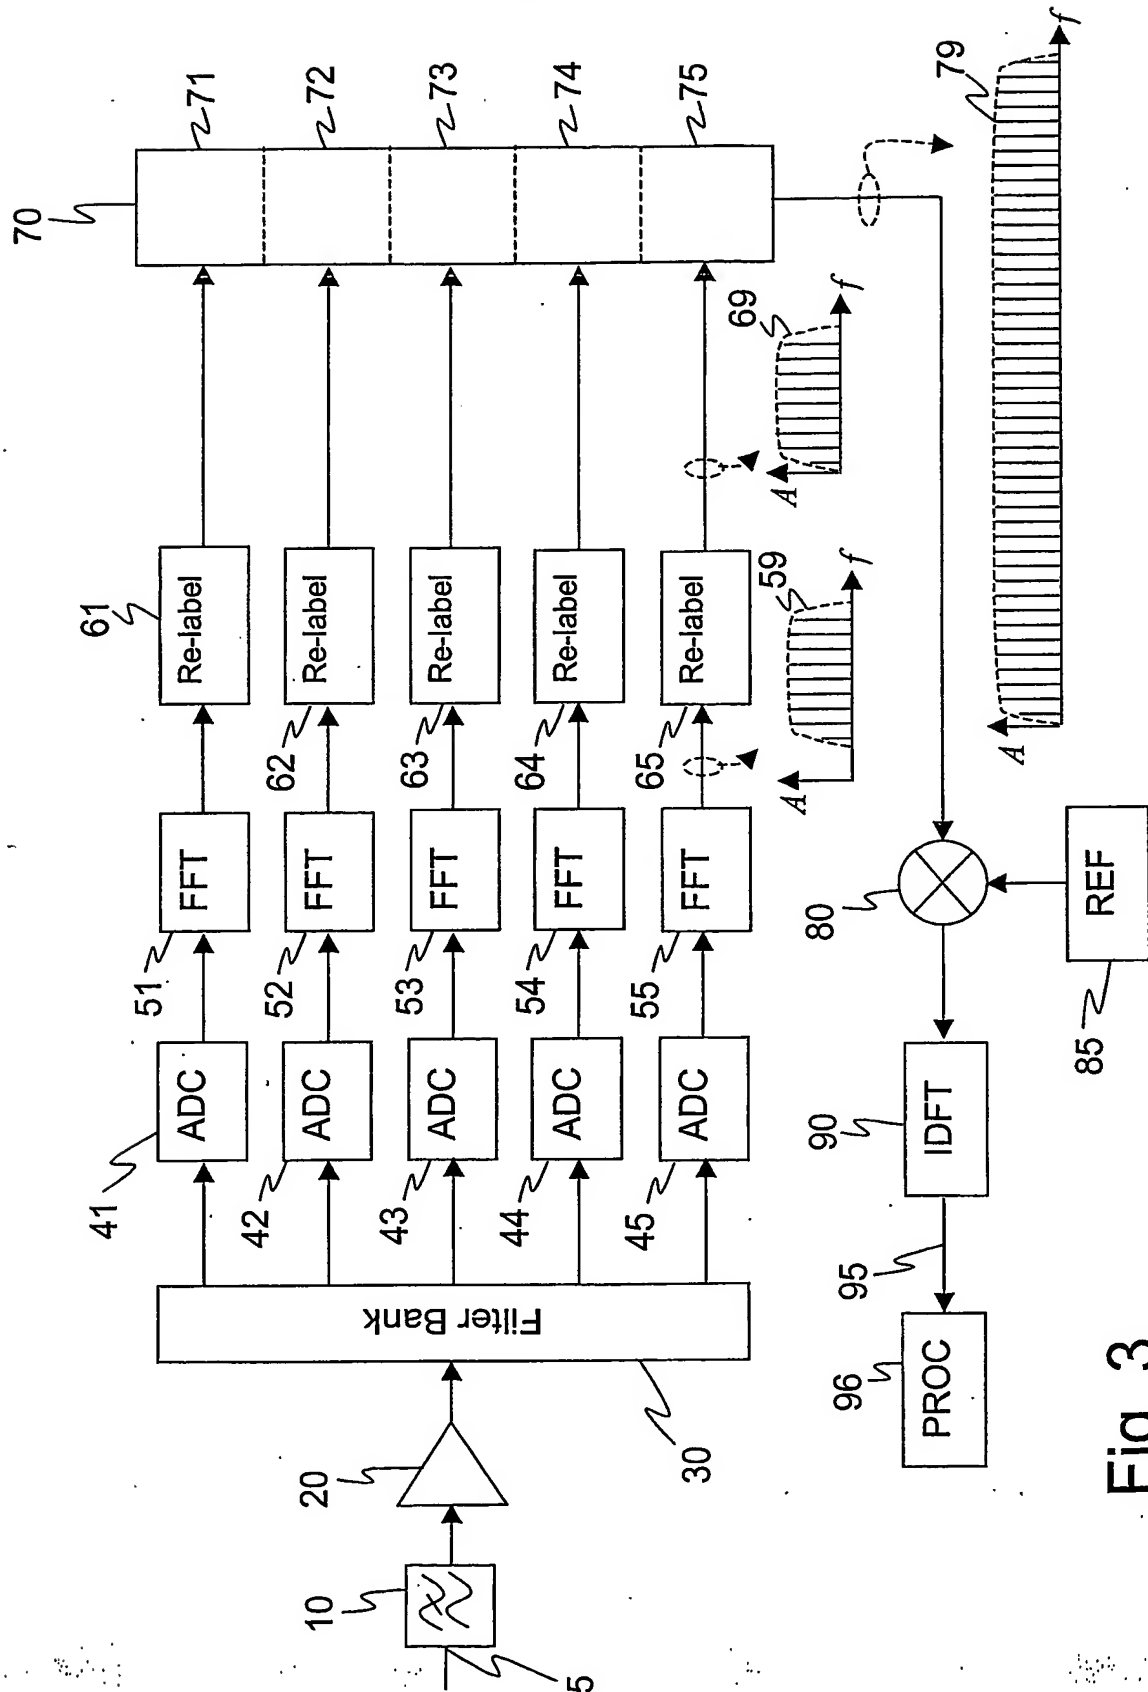


Fig. 3

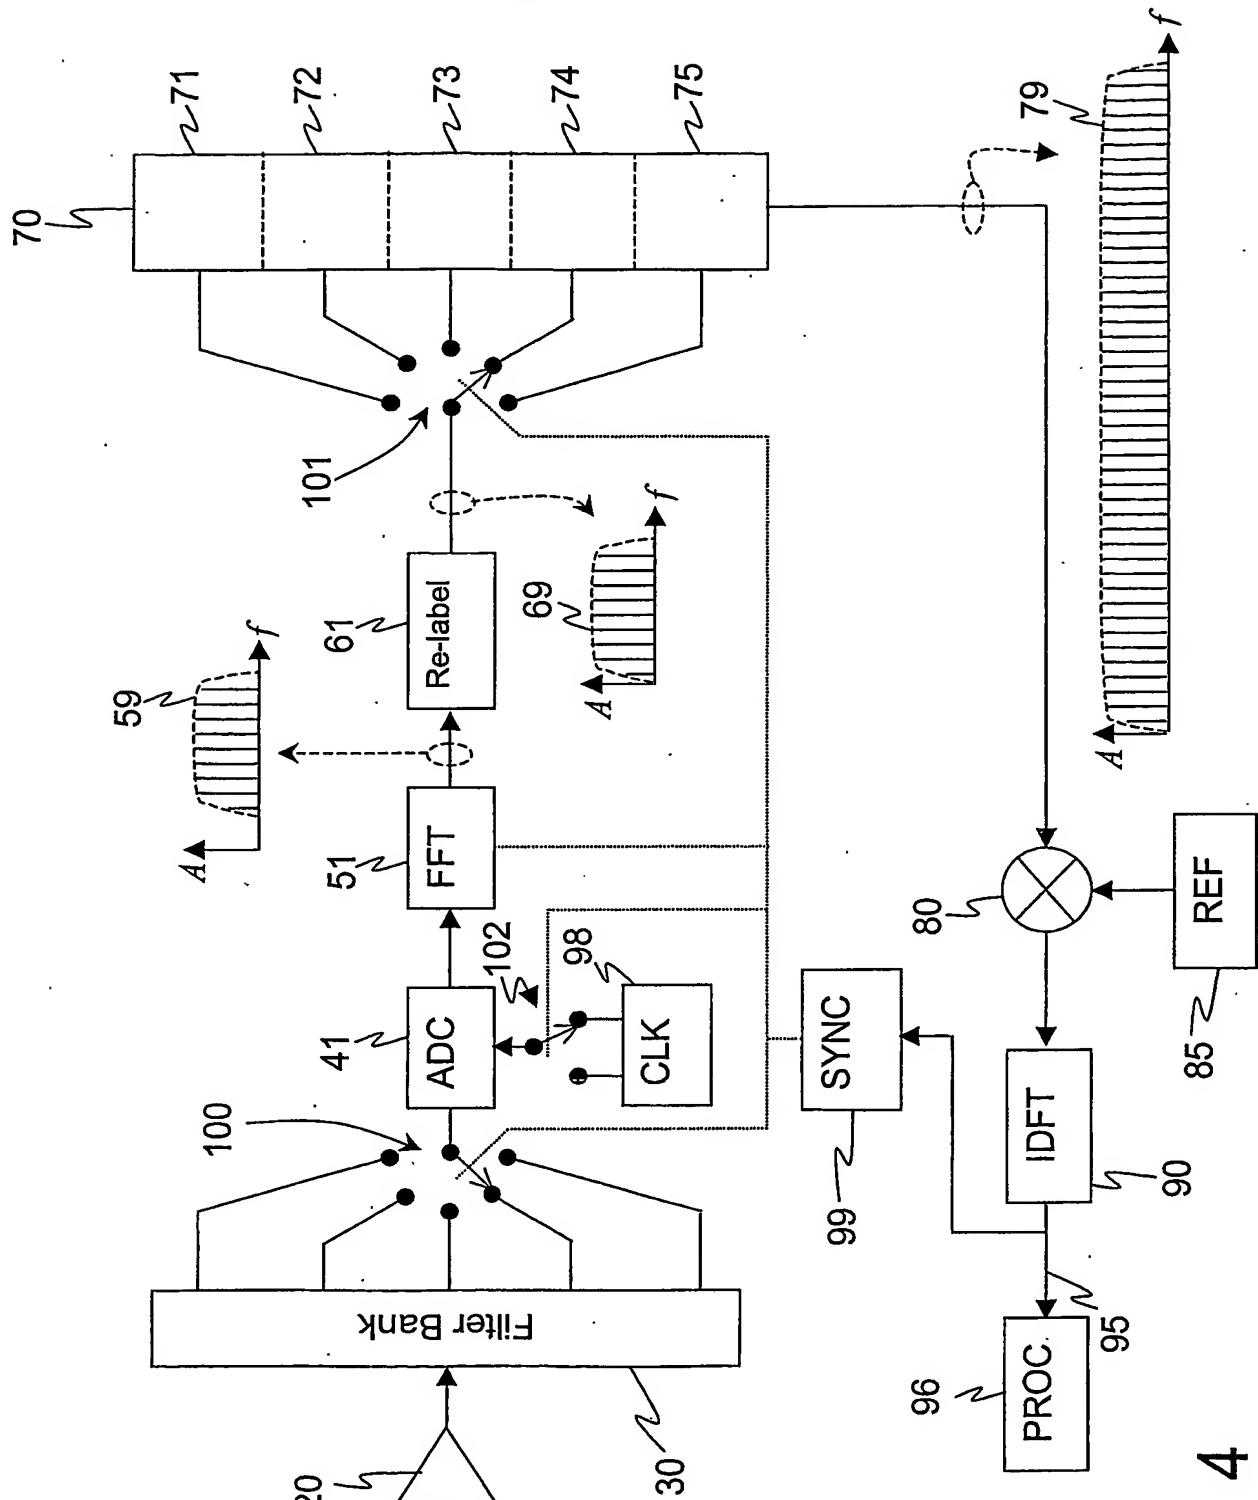


Fig. 4

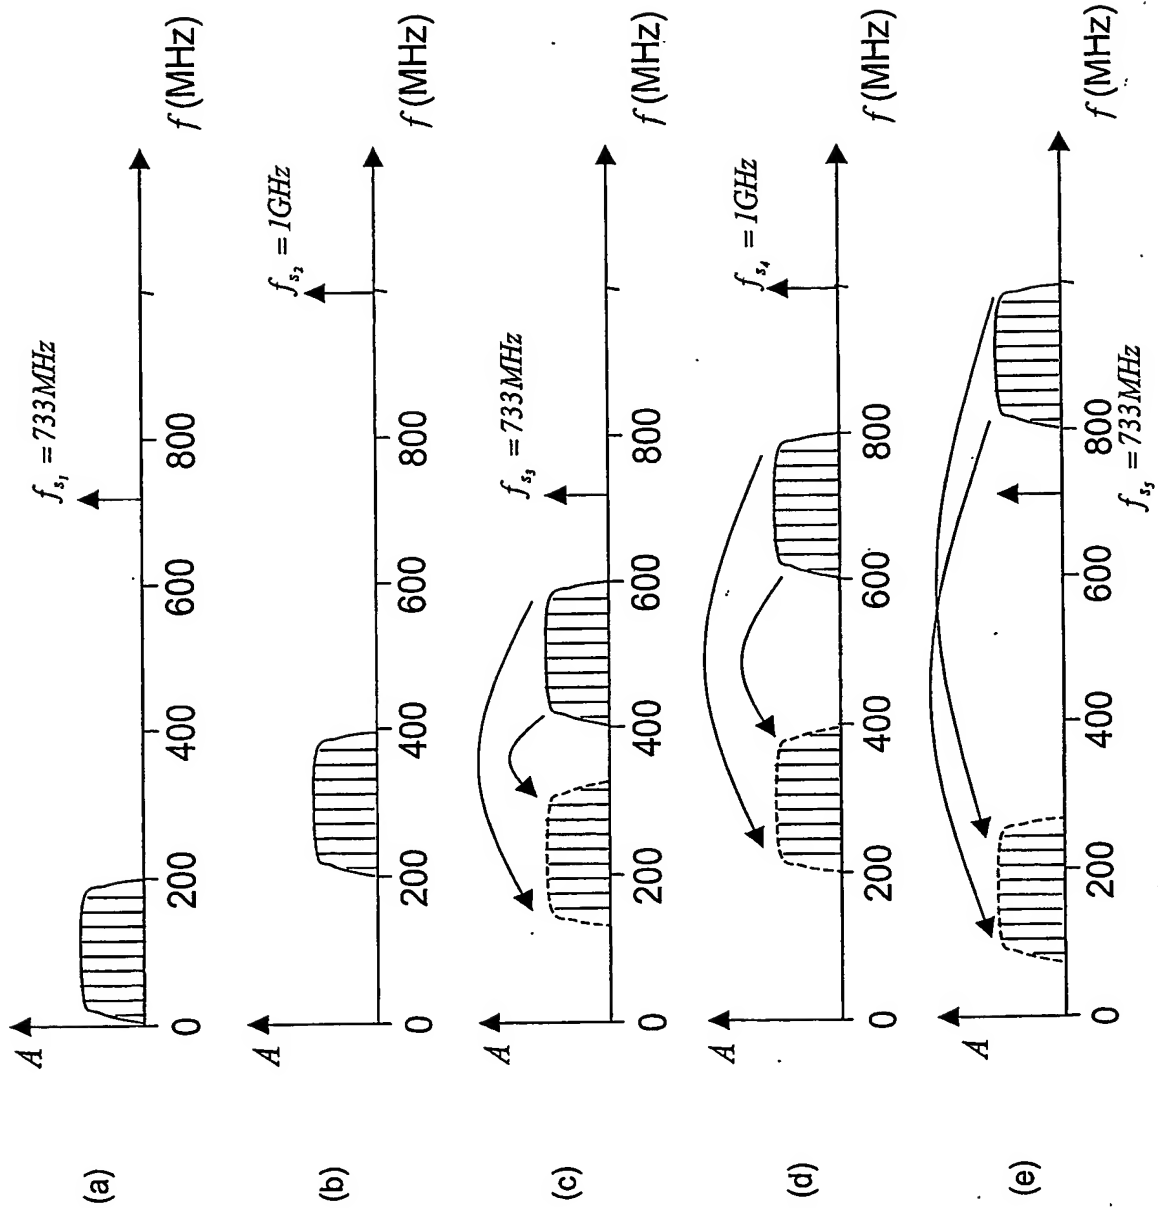


Fig. 5